



# GENERAL PURPOSE

ABOUT OSG

DRILLING

THREADING

MILLING


HOLDERS

INDEX

## List 105+

OSG GENERAL PURPOSE-POT H7

SPIRAL POINT	HSS	BR	TiN	2 FLUTE	C/4P	C/5P	0°	PACKED 1 PIECE
--------------	-----	----	-----	---------	------	------	----	-------------------

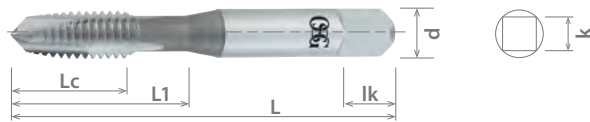

EDP	Thread Size	Thread Limit	Chamfer Type	Overall Length	Thread Length	Neck Length	Shank Diameter	Square Width	Square Length	Surface Treatment
				L (Inch)	Lc (Inch)	L1 (Inch)	d (Inch)	k (Inch)	lk (Inch)	
2003100	● No. 4 - 40 UNC	H7	Plug (5P)	1.875	0.319	0.559	0.141	0.110	0.188	Bright
1720800	● No. 6 - 32 UNC	H7	Plug (5P)	2.000	0.390	0.685	0.141	0.110	0.188	Bright
1720805	● No. 6 - 32 UNC	H7	Plug (5P)	2.000	0.390	0.685	0.141	0.110	0.188	TiN
1721200	● No. 8 - 32 UNC	H7	Plug (4P)	2.125	0.390	0.756	0.168	0.131	0.250	Bright
1721205	● No. 8 - 32 UNC	H7	Plug (4P)	2.125	0.390	0.756	0.168	0.131	0.250	TiN
1721600	● No. 10 - 24 UNC	H7	Plug (4P)	2.375	0.504	0.874	0.194	0.152	0.250	Bright
1721800	● No. 10 - 32 UNF	H7	Plug (4P)	2.375	0.504	0.874	0.194	0.152	0.250	Bright
1721805	● No. 10 - 32 UNF	H7	Plug (4P)	2.375	0.504	0.874	0.194	0.152	0.250	TiN

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

Note: Other coatings are available upon request.



P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium				
Low	Medium	High							6061	Casting			Inconel	6Al4V	~35 HRC	35-45 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH	○	○	○						
1018	1045															
○	○	○						○	○	○						
25-80 SFM	20-50 SFM	20-45 SFM						25-75 SFM	40-80 SFM	40-65 SFM						

○ Good ⊗ Best

