




List 2104

EXOCARB® AERO UVX-TI-LN-5FL, Reduced Neck

SPEED FEED 1375	CARBIDE	EXO	5 FLUTE	41-43°			SHANK h6	REG	PACKED 1 PIECE
---------------------------	----------------	------------	----------------	---------------	--	--	--------------------	------------	--------------------------

Cutting Diameter Tolerance	
12mm ≤ D ≤ 25mm	+0 / -0.050mm

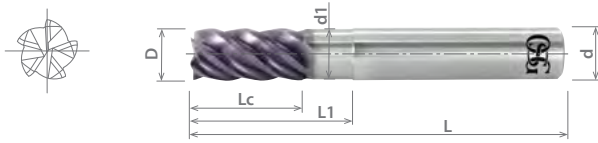

EDP Number		Diameter		Length of Cut		Neck Length		Neck Diameter		Overall Length		Shank Diameter	
		D (mm)	Lc (mm)	L1 (mm)	d1 (mm)	L (mm)	d (mm)						
8555320	●	12.00	24.00	36.00	11.50	90.00	12.00						
8555360	●	16.00	32.00	48.00	15.50	100.00	16.00						
8555400	●	20.00	40.00	60.00	19.50	120.00	20.00						
8555450	●	25.00	50.00	75.00	24.50	140.00	25.00						

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H					
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel					
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Nickel Alloy		Titanium									
Low	Medium	High			6061	7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
1010	1035	1065	4140	4340	300	400	17-4 PH											
1018	1045				○	○	○					⊙						

○ Good ⊙ Best

