




List 235

OSG CARBIDE DRILL/COUNTERSINK

CARBIDE	BR	2 FLUTE	0°	PACKED
				1 PIECE

Cutting Diameter Tolerance		
Size (mm)	mm	inch
1.191 ≤ D ≤ 5.556	+0.076 / -0	+0.003 / -0

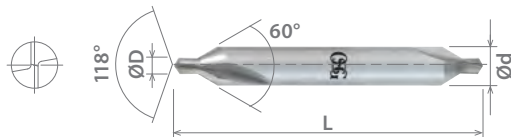

EDP Number		Diameter (D)			Type	Overall Length	Shank Diameter
		Fractional Size	mm	inch		L (in)	d (in)
235-0010	●	3/64	1.191	0.04688	1	1.472	0.125
235-0020	●	5/64	1.984	0.07813	2	1.827	0.188
235-0030	●	7/64	2.778	0.10938	3	1.872	0.250
235-0040	●	1/8	3.175	0.12500	4	2.425	0.313
235-0050	●	3/16	4.763	0.18750	5	2.638	0.438
235-0060	●	7/32	5.556	0.21875	6	2.869	0.500

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked
 Note: Other coatings are available upon request.



P					M			K	N		S		H					
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel					
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium						
Low	Medium	High							6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH	6061	7075									
○	○	○	⊙		○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ Good ⊙ Best

