



## List 4570

EXOCARB® WXS-CRE, High Feed



SPEED FEED  
1443

CARBIDE

WXS



0°



SHANK  
h6

STUB

PACKED  
1 PIECE

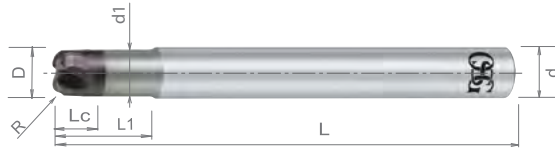

Cutting Diameter Tolerance	
2mm ≤ D ≤ 5mm	+0 / -0.020mm
6mm ≤ D ≤ 13mm	+0 / -0.030mm

EDP Number	Diameter	Corner Radius	Length of Cut		Neck Length	Neck Diameter	Overall Length	Shank Diameter	Number of Flutes
			D (mm)	R (mm)					
457002011	●	2.00	0.50	0.80	5.00	1.80	60.00	6.00	3
457003011	●	3.00	0.75	1.30	9.00	2.70	60.00	6.00	4
457004011	●	4.00	1.00	1.60	10.00	3.60	70.00	6.00	4
457005011	●	5.00	1.20	2.00	12.50	4.50	80.00	6.00	4
457006011	●	6.00	1.50	2.50	12.00	5.40	90.00	6.00	4
457007011	●	7.00	1.50	3.00	-	-	90.00	6.00	4
457008011	●	8.00	2.00	3.50	16.00	7.20	100.00	8.00	4
457009011	●	9.00	2.00	4.00	-	-	100.00	8.00	4
457010011	●	10.00	2.00	4.50	20.00	9.00	100.00	10.00	4
457011011	●	11.00	2.00	5.00	-	-	100.00	10.00	4
457012011	●	12.00	3.00	5.00	24.00	11.00	110.00	12.00	4
457013011	●	13.00	3.00	6.00	-	-	110.00	12.00	4

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum	Nickel Alloy	Titanium					
Low	Medium	High			6061	7075	Casting		Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
1010	1035	1065	4140	4340	300	400	17-4 PH						○	○	○	○
○	○	○	○	○	○	○	○	○					○	○	○	○

○ Good ○ Best

