

List 52510

OSG PHOENIX® PZAG SA, Cylindrical





SPEED FEED	INSERTS	ACCS.	STEEL	2 FLUTE	PACKED
370	298	299			1 PIECE




EDP Number	Designation	Diameter		Drilling Depth		Overall Length		Shank Diameter		Min. Drill Hole Size (in)	Max Stepover for Plunging		Type	Applicable Insert
		D (in)	I1 (in)	L1 (in)	L (in)	d (in)	Ar Max (in)							
52510000	● PZAG04R053SA075-2	0.531	0.797	1.063	3.813	0.750	0.216	0.157	1	ZPNT04				
52510001	● PZAG04R063SA075-2	0.625	0.938	1.250	4.000	0.750	0.310	0.157	1	ZPNT04				
52510002	● PZAG06R072SA075-2	0.719	1.078	1.438	4.188	0.750	0.246	0.236	1	ZPNT06				
52510003	● PZAG06R075SA075-2	0.750	1.125	1.500	4.250	0.750	0.278	0.236	1	ZPNT06				
52510004	● PZAG06R081SA100-2	0.813	1.219	1.625	4.625	1.000	0.340	0.236	1	ZPNT06				
52510005	● PZAG06R091SA100-2	0.906	1.359	1.813	4.813	1.000	0.434	0.236	1	ZPNT06				
52510006	● PZAG09R100SA100-2	1.000	1.500	2.000	5.000	1.000	0.291	0.354	1	ZPNT09				
52510007	● PZAG09R119SA125-2	1.188	1.781	2.375	5.525	1.250	0.479	0.354	1	ZPNT09				
52510008	● PZAG09R125SA125-2	1.250	1.875	2.500	5.650	1.250	0.541	0.354	1	ZPNT09				
52510009	● PZAG09R138SA125-2	1.375	2.063	2.750	5.900	1.250	0.666	0.354	2	ZPNT09				
52510010	● PZAG09R150SA125-2	1.500	2.250	3.000	6.150	1.250	0.791	0.354	2	ZPNT09				
52510011	● PZAG09R163SA125-2	1.625	2.438	3.250	6.400	1.250	0.916	0.354	2	ZPNT09				
52510012	● PZAG09R181SA125-2	1.813	2.719	3.625	6.775	1.250	1.104	0.354	2	ZPNT09				

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

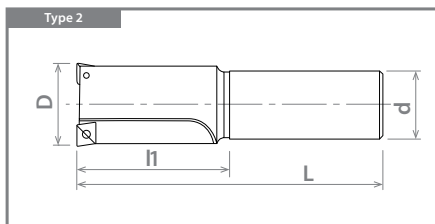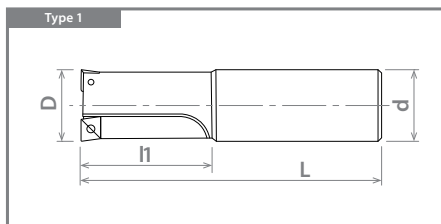

DESIGNATION EXPLANATION

PZAG-04-R-053-SA-075-2



See Full Detail on Page 360

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

