




List 566

OSG COBALT HSS DOUBLE END M-FDE, Miniature

HSS-Co	BR	4 FLUTE	30°		STUB	PACKED 1 PIECE
--------	----	---------	-----	--	------	-------------------

Cutting Diameter Tolerance	
D < Shank Dia.	+0.0011 / -0"
D = Shank Dia.	-0.0004 / -0.0015"

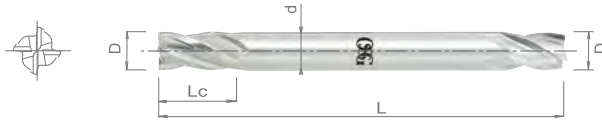

EDP Number		Diameter		Length of Cut		Overall Length		Shank Diameter	
		D (Fractional Size)		Lc (Inch)		L (Inch)		d (Inch)	
5667200	●	1/16		0.094		2.000		0.188	
5667400	●	3/32		0.141		2.000		0.188	
5667600	●	1/8		0.188		2.000		0.188	
5667800	●	5/32		0.234		2.000		0.188	
5668000	●	3/16		0.281		2.000		0.188	

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

Note: Other coatings available upon request.



P					M			K	N		S		H					
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel					
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium						
Low	Medium	High							6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH		6061	7075								
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ Good ○ Best

