




# List 7072

EXOCARB® DIAMOND LS-CR, Long Shank

<b>SPEED FEED</b> 1383	<b>CARBIDE</b>	<b>DIA</b>	<b>12µm</b>	<b>4 FLUTE</b>	<b>30°</b>		<b>SHANK</b> h6	<b>STUB</b>	<b>PACKED</b> 1 PIECE
---------------------------	----------------	------------	-------------	----------------	------------	--	--------------------	-------------	--------------------------

Cutting Diameter Tolerance	
1/8" ≤ D ≤ 1/2"	+0 / -0.002"

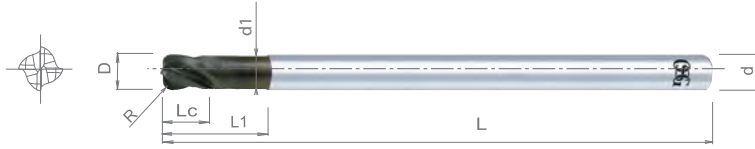

EDP Number	Diameter	Corner Radius	Length of Cut		Neck Length	Neck Diameter	Overall Length	Shank Diameter
			D (Fractional Size)	R (Inch)				
70720116	1/8	0.015	0.125	0.625	0.119	3.000	0.125	
70720216	1/8	0.031	0.125	0.625	0.119	3.000	0.125	
70720316	3/16	0.062	0.188	0.938	0.178	3.000	0.188	
70720416	1/4	0.015	0.250	0.750	0.238	4.000	0.250	
70720516	1/4	0.030	0.250	0.750	0.238	4.000	0.250	
70720616	1/4	0.062	0.250	0.750	0.238	4.000	0.250	
70720716	3/8	0.015	0.375	1.125	0.356	4.000	0.375	
70720816	1/2	0.015	0.500	1.500	0.475	6.000	0.500	

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



P					M			K	N			S		Other	
Steel					Stainless Steel			Cast Iron	Non-Ferrous			HRSA		Graphite	Cobalt-Chrome
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Mg		Brass, Bronze	Nickel Alloy	Titanium				
Low	Medium	High			6061	Casting						Inconel	6Al4V (30 HRC)		
1010	1035	1065	4140	4340	300	400	17-4 PH								
1018	1045														

○ Good ⊙ Best

