


## List 7120

EXOCARB® DIAMOND D-RG-EDS

<b>SPEED FEED</b> 1383	<b>CARBIDE</b>	<b>DIA</b>	<b>12µm</b>	<b>2 FLUTE</b>	<b>30°</b>		<b>SHANK</b> h6	<b>REG</b>	<b>LONG</b>	<b>PACKED</b> 1 PIECE
---------------------------	----------------	------------	-------------	----------------	------------	--	--------------------	------------	-------------	--------------------------

Cutting Diameter Tolerance	
1mm ≤ D ≤ 12mm	+0 / -0.050mm

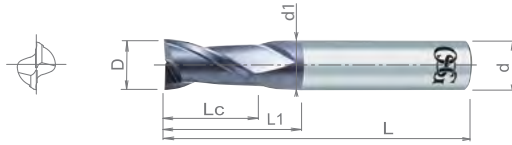

EDP Number		Diameter		Length of Cut		Neck Diameter		Overall Length		Shank Diameter	
		D (mm)	Lc (mm)	L1 (mm)	d1 (mm)	L (mm)	d (mm)				
71200116	●	1.00	4.00	4.95	0.95	45.00	3.00				
71200216	●	2.00	10.00	11.95	1.95	45.00	3.00				
71200316	●	3.00	15.00	-	-	50.00	3.00				
71200416	●	4.00	15.00	-	-	55.00	4.00				
71200616	●	6.00	20.00	-	-	63.00	6.00				
71200816	●	8.00	20.00	-	-	63.00	8.00				
71201016	●	10.00	25.00	-	-	63.00	10.00				
71201216	●	12.00	30.00	-	-	75.00	12.00				

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



P					M			K	N				S		Other	
Steel					Stainless Steel			Cast Iron	Non-Ferrous				HRSA		Graphite	Cobalt-Chrome
Carbon Steel			Alloy Steel	Die Steel	300	400	17-4 PH		Aluminum		Mg	Brass, Bronze	Nickel Alloy	Titanium		
Low	Medium	High							6061	7075						
1010	1035	1065	4140	4340												
1018	1045															

○ Good ⊙ Best

