



## List 78005

OSG PHOENIX<sup>®</sup> PRC SA



**SPEED FEED**  
1536-1537

**INSERTS**  
1254

**ACCS.**  
1255

**STEEL**





**PACKED**  
1 PIECE




EDP Number	Designation	Body Type	Type	Diameter		Number of Flutes	Neck Length	Overall Length	Shank Diameter	Applicable Insert
				D (Inch)	D1 (Inch)		L1 (Inch)	L (Inch)	d (Inch)	
7800500	● PRC10R100SA100-3S	Cylindrical Shank Short	1	1.000	0.606	3	2.362	5.512	1.000	RPH_10
7800501	● PRC10R125SA125-4S	Cylindrical Shank Short	1	1.250	0.856	4	2.756	5.905	1.250	RPH_10
7800502	● PRC12R125SA125-2S	Cylindrical Shank Short	1	1.250	0.778	2	2.756	5.905	1.250	RPH_12
7800503	● PRC12R150SA125-3S	Cylindrical Shank Short	2	1.500	1.028	3	1.968	5.905	1.250	RPH_12
7800504	● PRC16R150SA125-2S	Cylindrical Shank Short	2	1.500	0.870	2	1.968	5.905	1.250	RPH_16
7800505	● PRC10R100SA100-3L	Cylindrical Shank Long	1	1.000	0.606	3	4.724	7.874	1.000	RPH_10
7800506	● PRC10R125SA125-4L	Cylindrical Shank Long	1	1.250	0.856	4	4.724	7.874	1.250	RPH_10
7800507	● PRC12R125SA125-2L	Cylindrical Shank Long	1	1.250	0.778	2	4.724	7.874	1.250	RPH_12
7800508	● PRC12R150SA125-3L	Cylindrical Shank Long	2	1.500	1.028	3	1.968	9.842	1.250	RPH_12
7800509	● PRC16R150SA125-2L	Cylindrical Shank Long	2	1.500	0.870	2	1.968	9.842	1.250	RPH_16

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

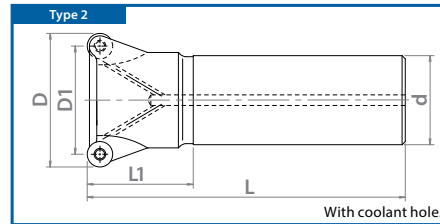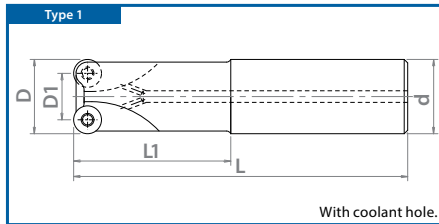

### DESIGNATION EXPLANATION

#### PRC 10 R 100 SA 100-3 S



See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	○	○	○	○	○

Material recommendation based on inserts compatible with this tool body.

○ Good ○ Best

