



List 8205

A BRAND AE-VMS



SPEED FEED
1338-1339

CARBIDE

DUARISE

4 FLUTE

37-40°




SHANK
h6

REG



PACKED
1 PIECE

Cutting Diameter Tolerance	
3mm ≤ D ≤ 12mm	+0 / -0.020mm
16mm ≤ D ≤ 25mm	+0 / -0.030mm



EDP Number		Diameter	Length of Cut	Overall Length	Shank Diameter	Type
		D (mm)	Lc (mm)	L (mm)	d (mm)	
8555830	●	3.00	8.00	60.00	6.00	1
8555840	●	4.00	11.00	60.00	6.00	1
8555850	●	5.00	13.00	60.00	6.00	1
8555860	●	6.00	13.00	60.00	6.00	2
8555880	●	8.00	19.00	70.00	8.00	2
8555900	●	10.00	22.00	80.00	10.00	2
8555920	●	12.00	26.00	90.00	12.00	2
8555960	●	16.00	32.00	100.00	16.00	2
8556000	●	20.00	40.00	110.00	20.00	2
8556010	●	25.00	50.00	120.00	25.00	2

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

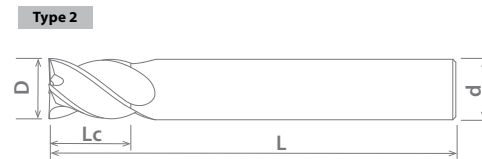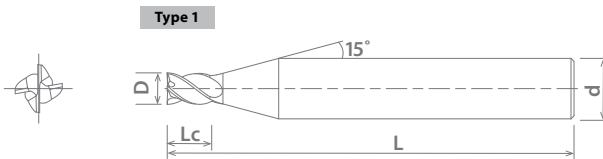

P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel	300	400	17-4 PH		Aluminum		Nickel Alloy	Titanium	Hardened Steel				
Low	Medium	High							6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH	Cast Iron	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ Good ○ Best

