



# A Brand AE-CR-MS-H

Advanced Performance Carbide End Mills with DUREY Coating

ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

## List 8570

A BRAND AE-CR-MS-H



NEW

SPEED FEED  
1348-1349

CARBIDE

DUREY

43°




SHRINK  
FIT

REG

PACKED  
1 PIECE

Cutting Diameter Tolerance	
3mm ≤ D ≤ 12mm	+0 / -0.020mm




EDP Number		Diameter	Corner Radius	Length of Cut	Neck Length	Overall Length	Shank Diameter	Number of Flutes	Type
		D (mm)	R (mm)	Lc (mm)	L1 (mm)	L (mm)	d (mm)		
8549842	●	3.00	0.20	7.50	15.40	60.00	6.00	4	1
8549845	▲	3.00	0.50	7.50	15.40	60.00	6.00	4	1
8549852	●	4.00	0.20	10.00	16.10	60.00	6.00	4	1
8549855	●	4.00	0.50	10.00	16.10	60.00	6.00	4	1
8549856	▲	4.00	1.00	10.00	16.10	60.00	6.00	4	1
8549862	●	5.00	0.20	12.50	16.70	60.00	6.00	4	1
8549865	▲	5.00	0.50	12.50	16.70	60.00	6.00	4	1
8549866	●	5.00	1.00	12.50	16.70	60.00	6.00	4	1
8549873	●	6.00	0.30	12.50	-	60.00	6.00	6	2
8549875	●	6.00	0.50	15.00	-	60.00	6.00	6	2
8549876	▲	6.00	1.00	15.00	-	60.00	6.00	6	2
8549883	●	8.00	0.30	20.00	-	70.00	8.00	6	2
8549885	●	8.00	0.50	20.00	-	70.00	8.00	6	2
8549886	●	8.00	1.00	20.00	-	70.00	8.00	6	2
8549887	▲	8.00	1.50	20.00	-	70.00	8.00	6	2
8549888	▲	8.00	2.00	20.00	-	70.00	8.00	6	2
8549893	●	10.00	0.30	25.00	-	80.00	10.00	6	2
8549895	●	10.00	0.50	25.00	-	80.00	10.00	6	2
8549896	●	10.00	1.00	25.00	-	80.00	10.00	6	2
8549897	▲	10.00	1.50	25.00	-	80.00	10.00	6	2
8549898	●	10.00	2.00	25.00	-	80.00	10.00	6	2
8549899	▲	10.00	3.00	25.00	-	80.00	10.00	6	2
8549903	●	12.00	0.30	30.00	-	90.00	12.00	6	2
8549905	●	12.00	0.50	30.00	-	90.00	12.00	6	2
8549906	●	12.00	1.00	30.00	-	90.00	12.00	6	2
8549907	▲	12.00	1.50	30.00	-	90.00	12.00	6	2
8549908	●	12.00	2.00	30.00	-	90.00	12.00	6	2
8549909	▲	12.00	3.00	30.00	-	90.00	12.00	6	2

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



Type1

Type2

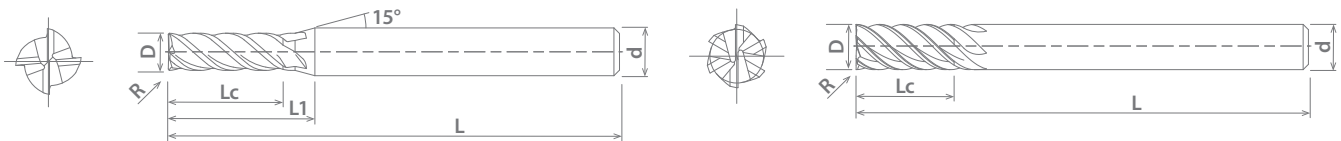

P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium					
Low	Medium	High			300	400	17-4 PH	6061	7075	Casting			Inconel	6Al4V	(30 HRC)	~35 HRC	35-45 HRC
1010	1035	1045	1065	4140				4340									
1018	1045																

○ Good ⊗ Best

