


List 9576

EXOPRO® PHX-LN-DFR, Long Neck, Deep Feed

SPEED FEED 1432-1433	CARBIDE	WXS	3 FLUTE	55°	SHANK h6	STUB	PACKED 1 PIECE
--------------------------------	----------------	------------	----------------	------------	--------------------	-------------	--------------------------

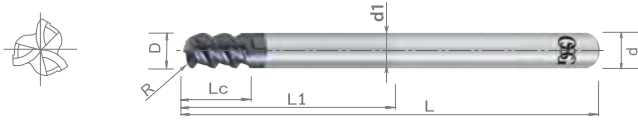

Cutting Diameter Tolerance	
4mm ≤ D ≤ 16mm	+/- 0.010mm

Radius Tolerance	
1 ≤ R ≤ 3	+/- 0.030mm

EDP Number	Diameter	Corner Radius	Length of Cut	Neck Length	Neck Diameter	Overall Length	Shank Diameter
3092041	4.00	1.00	6.00	20.00	3.80	70.00	4.00
3092042	4.00	1.00	6.00	28.00	3.80	70.00	4.00
3092061	6.00	1.50	9.00	30.00	5.80	80.00	6.00
3092062	6.00	1.50	9.00	42.00	5.80	90.00	6.00
3092063	6.00	1.50	9.00	54.00	5.80	100.00	6.00
3092081	8.00	2.00	12.00	40.00	7.70	85.00	8.00
3092082	8.00	2.00	12.00	56.00	7.70	100.00	8.00
3092083	8.00	2.00	12.00	72.00	7.70	120.00	8.00
3092101	10.00	2.00	15.00	50.00	9.70	100.00	10.00
3092102	10.00	2.00	15.00	70.00	9.70	120.00	10.00
3092103	10.00	2.00	15.00	90.00	9.70	140.00	10.00
3092121	12.00	2.00	18.00	60.00	11.70	110.00	12.00
3092122	12.00	2.00	18.00	84.00	11.70	135.00	12.00
3092123	12.00	2.00	18.00	108.00	11.70	160.00	12.00
3092161	16.00	3.00	24.00	80.00	15.50	140.00	16.00
3092162	16.00	3.00	24.00	120.00	15.50	175.00	16.00

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

EP

P					M			K	N		S		H					
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel					
Carbon Steel			Alloy Steel	Die Steel					Aluminum		Nickel Alloy	Titanium						
Low	Medium	High							6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH											
○	○	○	○	○	○	○	○	○					○	○	○	○	○	○

○ Good ○ Best



ABOUT OSG
DRILLING
THREADING
MILLING
HOLDERS
INDEX