




List 570

OSG COBALT HSS DOUBLE END M-DDEB, Miniature

HSS-Co	BR	2 FLUTE	30°		STUB	PACKED 1 PIECE
--------	----	---------	-----	--	------	-------------------

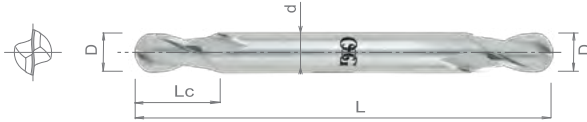

Cutting Diameter Tolerance	
D < Shank Diameter	+0 / -0.0011"
D = Shank Diameter	-0.0004 / -0.0015"

EDP Number		Diameter		Length of Cut	Overall Length	Shank Diameter
		D (Fractional Size)		Lc (Inch)	L (Inch)	d (Inch)
5707200	●	1/16		0.094	2.000	0.188
5707400	●	3/32		0.141	2.000	0.188
5707600	●	1/8		0.188	2.000	0.188
5707800	●	5/32		0.234	2.000	0.188
5708000	●	3/16		0.281	2.000	0.188

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked
 Note: Other coatings available upon request.



ABOUT OSG

DRILLING

THREADING

MILLING

HOLDERS

INDEX

P					M			K	N		S		H				
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel				
Carbon Steel			Alloy Steel	Die Steel	Aluminum		Inconel		Titanium								
Low	Medium	High			6061	7075				Casting	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
1010	1035	1065	4140	4340	300	400	17-4 PH										
1018	1045																

○ Good ○ Best

