




List 78234

OSG PHOENIX[®] PMD SS

SPEED FEED 1532-1533	INSERTS 1233-1236	ACCS. 1237	STEEL	2 FLUTE	PACKED 1 PIECE
--------------------------------	-----------------------------	----------------------	--------------	----------------	--------------------------

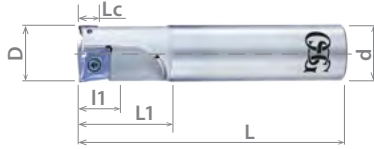


EDP Number	Designation	Body Type	Dia.		Number of Effective Flutes	Length of Cut		Drilling Depth		Neck Length		Overall Length		Shank Dia.		Center Insert	Peripheral Insert
			D (mm)	d (mm)		Lc (mm)	l1 (mm)	L1 (mm)	L (mm)	L (mm)	L (mm)	d (mm)					
7803410	▲ PMD11R020SS020-1S	Cylindrical Shank Short	20.00		1	10.00	20.00	35.00	130.00	20.00						ZPNT10	ZDKT11
7803411	▲ PMD11R025SS025-1S	Cylindrical Shank Short	25.00		1	10.00	25.00	45.00	140.00	25.00						ZPNT13	ZDKT11
7803412	▲ PMD11R032SS032-1S	Cylindrical Shank Short	32.00		1	10.00	28.00	50.00	150.00	32.00						ZPNT17	ZDKT11
7803413	▲ PMD11R020SS020-1L	Cylindrical Shank Long	20.00		1	10.00	20.00	60.00	185.00	20.00						ZPNT10	ZDKT11
7803414	▲ PMD11R025SS025-1L	Cylindrical Shank Long	25.00		1	10.00	25.00	75.00	220.00	25.00						ZPNT13	ZDKT11
7803415	▲ PMD11R032SS032-1L	Cylindrical Shank Long	32.00		1	10.00	28.00	90.00	230.00	32.00						ZPNT17	ZDKT11

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked



DESIGNATION EXPLANATION

PMD 11 R 020 SS 20-1S

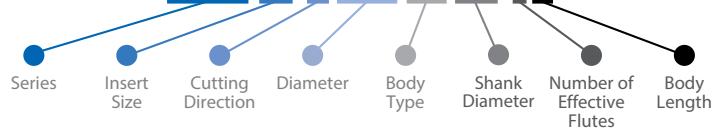

See Full Detail on Page 1524

P	M	K	N	S	H
Steel	Stainless Steel	Cast Iron	Non-Ferrous	HRSA	Hardened Steel
○	⊙	⊙	⊙	⊙	⊙

Material recommendation based on inserts compatible with this tool body.

○ Good ⊙ Best

