

A Brand AE-CR-TS-N


DLC Coated Carbide End Mills for Non-Ferrous Materials

List 8775

A BRAND AE-CR-TS-N, 3 Flutes, Regular Length, Reduced Neck, Corner Radius



A SPEED FEED 21-23 CARBIDE DLC 3 FLUTE ~40° SHRINK FIT REG PACKED 1 PIECE

Cutting Diameter Tolerance	
3mm ≤ D ≤ 12mm	+0/-0.020mm

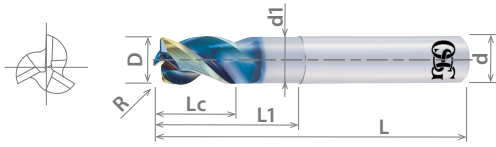

EDP Number	Diameter	Corner Radius	Length of Cut	Neck Length	Neck Diameter	Overall Length	Shank Diameter	Type
8557370	3	0.2	4.5	2.85	9	55	6	1
8557371	3	0.5	4.5	2.85	9	55	6	1
8557372	4	0.2	6	3.8	12	55	6	1
8557373	4	0.5	6	3.8	12	55	6	1
8557374	4	1	6	3.8	12	55	6	1
8557375	5	0.2	7.5	4.8	15	55	6	1
8557376	5	0.5	7.5	4.8	15	55	6	1
8557377	5	1	7.5	4.8	15	55	6	1
8557378	6	0.3	9	5.8	18	60	6	2
8557379	6	0.5	9	5.8	18	60	6	2
8557380	6	1	9	5.8	18	60	6	2
8557381	8	0.3	12	7.7	24	70	8	2
8557382	8	0.5	12	7.7	24	70	8	2
8557383	8	1	12	7.7	24	70	8	2
8557384	8	1.5	12	7.7	24	70	8	2
8557385	8	2	12	7.7	24	70	8	2
8557386	10	0.3	15	9.7	30	75	10	2
8557387	10	0.5	15	9.7	30	75	10	2
8557388	10	1	15	9.7	30	75	10	2
8557389	10	1.5	15	9.7	30	75	10	2
8557390	10	2	15	9.7	30	75	10	2
8557391	10	3	15	9.7	30	75	10	2
8557392	12	0.3	18	11.7	36	80	12	2
8557393	12	0.5	18	11.7	36	80	12	2
8557394	12	1	18	11.7	36	80	12	2
8557395	12	1.5	18	11.7	36	80	12	2
8557396	12	2	18	11.7	36	80	12	2
8557397	12	3	18	11.7	36	80	12	2

● Stocked ○ Available Upon Request; MOQ May Apply ▲ Globally Stocked

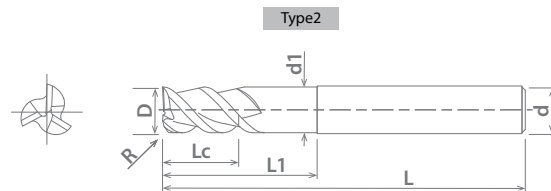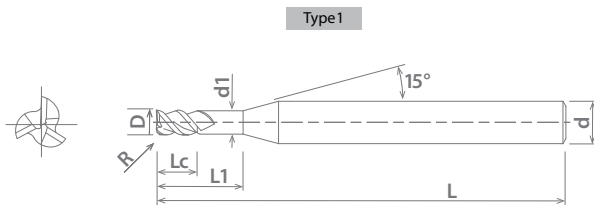

P					M			K	N		S		H			
Steel					Stainless Steel			Cast Iron	Non-Ferrous		HRSA		Hardened Steel			
Carbon Steel			Alloy Steel	Die Steel					Aluminum	Nickel Alloy	Titanium					
Low	Medium	High			4140 4340		300		400	17-4 PH	6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1010 1018	1035 1045	1065														

○ Good ⊙ Best

